



**CUSH-WRAP**

**Cushion Wrap**

**SERVICE:** Provides protection from galvanic action between dissimilar metals, isolates pipe and absorbs sound and vibrations between pipe and mounting system.

**MATERIAL:** EPDM Elastomer


**MAX TEMP:** 300°F

**ORDERING:** Specify figure number. Cushion Wrap is supplied in 25' rolls.

O.D. TUBING		
NOMINAL PIPE SIZE	LENGTH OF CUSH WRAP	PLATED O.D. CLAMP SIZE
1/4	7/8	3/8
3/8	1 1/4	1/2
1/2	1 5/8	5/8
5/8	2	3/4
3/4	2 3/8	7/8
7/8	2 3/4	1
1	3 1/4	1 1/8
1 1/8	3 5/8	1 3/8
1 1/4	4	1 1/2
1 3/8	4 3/8	1 1/2
1 1/2	4 3/4	1 3/4
1 5/8	5 1/8	1 3/4
1 3/4	5 1/2	2
1 7/8	6	2
2	6 3/8	2 1/8
2 1/8	6 3/4	2 1/4
2 1/4	7 1/8	2 1/2
2 3/8	7 1/2	2 5/8
2 1/2	7 5/8	2 5/8
2 5/8	8 1/4	2 3/4
2 3/4	8 3/4	2 7/8
2 7/8	9 1/8	3 1/8
3	9 1/2	3 1/4
3 1/8	9 5/8	3 1/4
3 1/4	10 1/4	3 3/8
3 3/8	10 5/8	3 1/2
3 1/2	11	3 5/8
3 5/8	11 1/2	3 3/4
3 3/4	11 7/8	3 7/8
3 7/8	12 1/4	4
4	12 5/8	4 1/4
4 1/8	13	4 1/4

COPPER TUBING TYPE L AND TYPE K		
NOMINAL PIPE SIZE	LENGTH OF CUSH WRAP	PLATED O.D. CLAMP SIZE
1/4	1 1/4	1/2
3/8	1 5/8	5/8
1/2	2	3/4
5/8	2 3/8	7/8
3/4	2 3/4	1
1	3 5/8	1 3/8
1 1/4	4 3/8	1 1/2
1 1/2	5 1/8	1 3/4
2	6 3/4	2 1/4
2 1/2	8 1/4	2 3/4
3	9 7/8	3 3/4
3 1/2	11 1/2	3 3/4
4	13	4 1/4

STANDARD PIPE RIGID CONDUIT		
NOMINAL PIPE SIZE	LENGTH OF CUSH WRAP	PLATED O.D. CLAMP SIZE
1/4	1 3/4	3/4
3/8	2 1/8	7/8
1/2	2 3/4	1
3/4	3 3/8	1 1/4
1	4 1/4	1 1/2
1 1/4	5 1/4	1 7/8
1 1/2	6	2 1/8
2	7 1/2	2 5/8
2 1/2	9 1/8	3 1/8
3	11	3 5/8
3 1/2	12 5/8	4 1/4
4	14 1/4	4 3/4
5	17 1/2	5 5/8
6	20 5/8	6 3/4
8	27 1/8	8 3/4

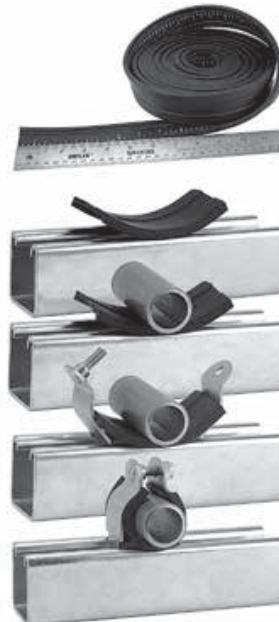

1. Cut appropriate length strip using the cutting schedule shown on left.
2. Place the pipe on the Cushion Wrap.
3. Insert the clamps in the strut.
4. Tighten the clamps.

